

# Metal Orifice Assemblies

## Description

One-piece construction of solid metal is employed. Orifices are accurately machined, thoroughly cleaned, and flow tested to exacting standards. Sizes range from .004" to .125" orifice diameter. Special sizes can be made to order. Type DEL is a two-piece construction.

## Applications

- Precision Flow Control – Gases or Liquids
- Speed Controls – Cylinders and Actuators
- Accurate Timing in Pneumatic or Hydraulic Circuits
- Flow Restriction
- Accurate Throttling
- Snubbers - Gages and Instruments
- Ultrasonic Sound Sources

## Advantages

- High Pressure Capability
- Bi-directional Flow Compatibility
- Economical Precision Orifice
- Repeatable Orifice Size and Shape
- Predictable Flow Rate

## Flow Direction

Metal Orifice Assemblies can be used for flow in either direction. The data on pages 20 and 21 is for a flow direction as shown in the right column on this page.

## Kits

See pages 30-31 for kit selection.

## General Specifications

### Maximum Operating Pressure –

Brass 2000 psig  
303 SS 4000 psig

### Type DEL

Brass 200 psig

**Flow** – See flow chart for air on pages 20 and 21.

**Orifice Diameters** – .004" to .125" standard. Consult factory for other sizes.

**Orifice Diameter Accuracy** – ±.0005"

**C<sub>v</sub> Range** – .00035 to .37 See pages 20 and 21.

**Fluid Media** – Air, Water, Gases and Liquids compatible with materials of construction.

**Dimensions** – See drawings on page 9.

## NPT CONNECTIONS

Size Number	Orifice Dia. In.	Size Number Range
4	.0039	
5	.0051	
6	.0059	
7	.0071	
8	.0079	
9	.0091	
10	.0102	
11	.0110	
12	.0122	
13	.0130	
14	.0142	
15	.0150	
16	.016	
17	.017	
18	.018	
19	.019	
20	.020	
21	.021	
22	.022	
23	.023	
24	.024	
25	.025	
26	.026	
27	.027	
28	.028	
29	.029	
31	.031	
32	.032	
33	.033	
35	.035	
37	.037	
38	.038	
39	.039	
40	.040	
41	.041	
42	.042	
43	.043	
47	.047	
52	.052	
55	.055	
60	.060	
63	.063	
67	.067	
70	.070	
73	.073	
76	.076	
79	.079	
81	.081	
86	.086	
89	.089	
94	.094	
96	.096	
100	.100	
104	.104	
109	.109	
113	.113	
120	.120	
125	.125	

**Type B, E or V**  
Brass 4-125  
303SS 4-125

**Type D, G, H or VV or VV**  
Brass 4-125  
303SS 4-125

**Type BM or EM**  
Brass 4-125  
303SS 4-125


**Type BH or EH**  
Brass 4-125  
303SS 4-125

**Type BMM**  
Brass 4-125  
303SS 4-125


**Type DEL**  
Brass 4-63

## Construction

### Type B, E or V




Orifice diameter .021" or larger




Orifice diameter .020" or smaller

### Type D, G, H or VV




Orifice diameter .021" or larger




Orifice diameter .020" or smaller


### Type BM or EM




### Type BH or EH



### Type BMM



### Type DEL



## Part Numbers

The complete part number for an orifice assembly includes Type, Size Number, Body Material and Options.

### EXAMPLES

Type	Size Number	Body Material	Options	Part Number
B	10 (.010")	Brass	–	B-10-BR
G	15 (.015")	Brass	–	G-15-BR
D	20 (.020")	SS	–	D-20-SS



# Metal Orifice Assemblies

## Dimensions

## NPT CONNECTIONS

## Specifications

Type B, E or V

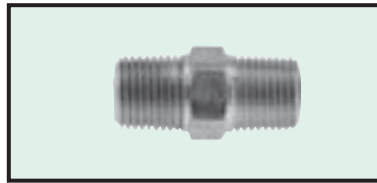

Type	Dim. L	HEX	NPT
B	.97"	7/16"	1/8"
E	1.38"	9/16"	1/4"
V	1.47"	11/16"	3/8"

### HEX NIPPLE

Body and Orifice – Brass or 303 SS



Threads – 1/8", 1/4" or 3/8" NPT

Standard Orifice Sizes –

Brass – .004" to .125" Dia.

303 SS – .004" to .125" Dia.

Type D, G, H or VV

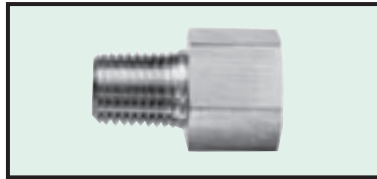

Type	Dim. L	HEX	NPT
D	.88"	9/16"	1/8"
G	1.25"	3/4"	1/4"
VV	1.52"	7/8"	3/8"
H	1.69"	1-1/16"	1/2"

### ADAPTER

Body and Orifice – Brass or 303 SS


Threads – 1/8", 1/4", 3/8" or 1/2" NPT

Standard Orifice Sizes –

Brass – .004" to .125" Dia.

303 SS – .004" to .125" Dia.

Type BM or EM



Type	Dim. L	HEX	NPT
BM	.580"	7/16"	1/8"
EM	.800"	9/16"	1/4"

### BLEED PLUG

Body and Orifice – Brass or 303 SS



Thread – 1/8" or 1/4" NPT

Standard Orifice Sizes –

Brass – .004" to .125" Dia.

303 SS – .004" to .125" Dia.

Type BH or EH

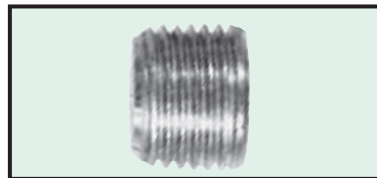

Type	Dim. L	HEX	NPT
BH	.30"	3/16"	1/8"
EH	.46"	1/4"	1/4"

### BLEED PLUG

Body and Orifice – Brass or 303 SS



Thread – 1/8" or 1/4" NPT

Standard Orifice Sizes –

Brass – .004" to .125" Dia.

303 SS – .004" to .125" Dia.

Type BMM

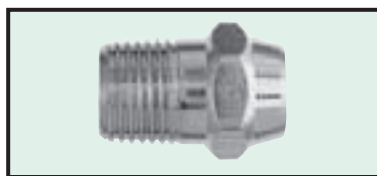

### BLEED PLUG

Body and Orifice – Brass or 303 SS



Thread – 1/8" NPT

Standard Orifice Sizes –

Brass – .004" to .125" Dia.

303 SS – .004" to .125" Dia.

Type DEL

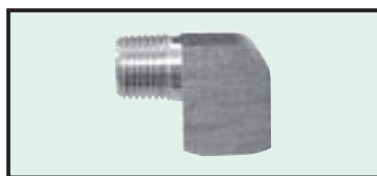

### ELBOW

Body and Orifice – Brass

Threads – 1/8" NPT

Standard Orifice Sizes – .004" to .063" Dia.

Orifice – Press fit insert






# Metal Orifice Water Flow – Gallons/minute

Orifice Diameter Inches	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	31	32	33											
Supply Pressure - psig	0.0035	0.006	0.009	0.012	0.015	0.019	0.025	0.031	0.038	0.044	0.050	0.056	0.062	0.067	0.073	0.080	0.089	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.25	0.26	0.27	0.28	0.29	0.31	0.32	0.33
1	0.00035	0.0006	0.0009	0.0012	0.0015	0.0019	0.0025	0.0031	0.0038	0.0044	0.0050	0.0056	0.0062	0.0067	0.0073	0.0080	0.009	0.010	0.011	0.012	0.013	0.014	0.015	0.016	0.017	0.018	0.019	0.022	0.024	0.026	0.028	0.029	0.031	0.032	0.033					
2	0.00049	0.0009	0.0012	0.0017	0.0021	0.0027	0.0035	0.0040	0.0048	0.0054	0.0061	0.0071	0.0078	0.0085	0.0095	0.0103	0.0113	0.012	0.014	0.016	0.017	0.018	0.020	0.023	0.024	0.025	0.027	0.031	0.034	0.035										
3	0.00061	0.0011	0.0015	0.0021	0.0026	0.0033	0.0043	0.0048	0.0059	0.0066	0.0074	0.0087	0.0095	0.0116	0.0126	0.0139	0.015	0.017	0.019	0.021	0.023	0.024	0.028	0.029	0.031	0.033	0.038	0.042	0.043											
4	0.00070	0.0012	0.0017	0.0024	0.0030	0.0038	0.0050	0.0056	0.0068	0.0076	0.0086	0.0100	0.0110	0.0134	0.0146	0.0160	0.018	0.019	0.022	0.024	0.026	0.028	0.032	0.034	0.036	0.038	0.044	0.048	0.050											
5	0.00078	0.0014	0.0019	0.0027	0.0034	0.0042	0.0056	0.0063	0.0076	0.0085	0.0102	0.0112	0.0123	0.0150	0.0163	0.0179	0.020	0.021	0.025	0.027	0.030	0.033	0.036	0.039	0.040	0.042	0.049	0.054	0.056											
6	0.00086	0.0015	0.0021	0.0029	0.0037	0.0047	0.0061	0.0069	0.0083	0.0093	0.0105	0.0122	0.0135	0.0164	0.0179	0.0196	0.022	0.024	0.027	0.029	0.032	0.034	0.039	0.042	0.044	0.047	0.054	0.059	0.061											
7	0.00093	0.0016	0.0023	0.0032	0.0040	0.0050	0.0066	0.0074	0.0090	0.0101	0.0114	0.0132	0.0146	0.0177	0.0193	0.0212	0.023	0.025	0.029	0.032	0.034	0.037	0.042	0.045	0.048	0.050	0.058	0.063	0.066											
8	0.00099	0.0017	0.0024	0.0034	0.0044	0.0054	0.0071	0.0079	0.0096	0.0107	0.0122	0.0141	0.0156	0.0190	0.0206	0.0226	0.025	0.027	0.031	0.034	0.037	0.040	0.045	0.048	0.051	0.054	0.062	0.068	0.071											
9	0.00105	0.0018	0.0026	0.0036	0.0045	0.0057	0.0075	0.0084	0.0102	0.0114	0.0129	0.0145	0.0165	0.0201	0.0219	0.0240	0.026	0.029	0.033	0.036	0.039	0.042	0.048	0.051	0.054	0.057	0.066	0.072	0.075											
10	0.00111	0.0019	0.0027	0.0038	0.0047	0.0060	0.0079	0.0089	0.0108	0.0120	0.0136	0.0158	0.0174	0.0212	0.0231	0.0253	0.028	0.030	0.035	0.038	0.041	0.044	0.051	0.054	0.057	0.060	0.070	0.076	0.079											
15	0.00136	0.0024	0.0033	0.0046	0.0058	0.0074	0.0097	0.0108	0.0132	0.0147	0.0167	0.0194	0.0213	0.0259	0.0283	0.0310	0.034	0.037	0.043	0.046	0.050	0.054	0.062	0.066	0.070	0.074	0.085	0.093	0.097											
20	0.00157	0.0027	0.0038	0.0054	0.0067	0.0085	0.0112	0.0125	0.0152	0.0170	0.0192	0.0224	0.0246	0.0300	0.0326	0.0358	0.039	0.043	0.049	0.054	0.058	0.067	0.072	0.076	0.080	0.085	0.098	0.107	0.112											
30	0.00192	0.0033	0.0047	0.0066	0.0082	0.0104	0.0137	0.0153	0.0186	0.0208	0.0236	0.0274	0.0301	0.0367	0.0400	0.0438	0.048	0.053	0.060	0.066	0.071	0.077	0.088	0.093	0.099	0.104	0.120	0.131	0.137											
40	0.00221	0.0039	0.0054	0.0076	0.0095	0.0120	0.0158	0.0177	0.0215	0.0240	0.0272	0.0316	0.0348	0.0424	0.0462	0.0506	0.056	0.061	0.070	0.076	0.082	0.089	0.101	0.108	0.114	0.120	0.139	0.152	0.158											
50	0.00247	0.0043	0.0061	0.0085	0.0106	0.0134	0.0177	0.0198	0.0240	0.0269	0.0304	0.0354	0.0389	0.0474	0.0516	0.0566	0.062	0.068	0.078	0.085	0.092	0.099	0.113	0.120	0.127	0.134	0.156	0.170	0.177											
60	0.00271	0.0047	0.0067	0.0093	0.0116	0.0147	0.0194	0.0217	0.0263	0.0294	0.0333	0.0387	0.0426	0.0519	0.0565	0.0620	0.068	0.074	0.085	0.093	0.101	0.108	0.124	0.132	0.139	0.147	0.170	0.186	0.194											
70	0.00293	0.0051	0.0072	0.0100	0.0125	0.0159	0.0209	0.0234	0.0284	0.0318	0.0360	0.0418	0.0460	0.0561	0.0611	0.0669	0.074	0.080	0.092	0.100	0.109	0.117	0.134	0.142	0.151	0.159	0.184	0.201	0.209											
80	0.00313	0.0055	0.0077	0.0107	0.0134	0.0170	0.0224	0.0250	0.0304	0.0340	0.0385	0.0447	0.0492	0.0599	0.0653	0.0716	0.079	0.086	0.098	0.107	0.116	0.125	0.143	0.152	0.161	0.170	0.197	0.215	0.224											
90	0.00332	0.0058	0.0082	0.0114	0.0142	0.0180	0.0237	0.0266	0.0323	0.0360	0.0408	0.0474	0.0522	0.0636	0.0693	0.0759	0.083	0.091	0.104	0.114	0.123	0.133	0.152	0.161	0.171	0.180	0.209	0.228	0.237											
100	0.00350	0.0061	0.0086	0.0120	0.0150	0.0190	0.0250	0.0280	0.0340	0.0380	0.0430	0.0500	0.0550	0.0670	0.0730	0.0800	0.088	0.096	0.110	0.120	0.130	0.140	0.160	0.170	0.180	0.190	0.220	0.240	0.250											
Orifice Diameter Inches	0.035	0.037	0.038	0.039	0.04	0.041	0.042	0.043	0.044	0.047	0.052	0.055	0.06	0.063	0.067	0.07	0.073	0.076	0.079	0.081	0.086	0.089	0.094	0.096	0.1	0.104	0.109	0.113	0.12	0.125										

Above chart data calculated based on the C<sub>v</sub> for each orifice. Flow = C<sub>v</sub>√ΔP. ΔP = differential pressure in psid. It is assumed that the region on either side of the orifice is fully flooded with no air pockets.



**P.O. BOX Q • TRUMBULL, CONNECTICUT 06611 • CT PHONE (203) 261-6711 • TOLL FREE PHONE (800) 533-3285 • FAX (203) 261-8331**  
 • 2006 ALL RIGHTS RESERVED • e-mail ca@okcc.com • website www.okcc.com

